



The new RAGNO generation

RAGNO TSJ 30

Available on tracks, or on wheels, it is the classic spider platform, having the possibility to vary the angle and the position of each leg independently, for a perfect set-up in restricted areas and on important slopes. Light and compact, it can pass through a door and move and work either outside, on soft and irregular grounds, and in interiors, on delicate flooring, thanks to its "bi-energy" system including diesel engine and AC (or DC) el. motor. A special "area managing system" constantly monitors the position of each leg and the load on the cage, granting automatic protection under any aerial condition.



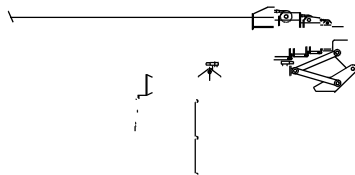

RAGNO TSJ 30R	MODEL	RAGNO TSJ 30C
10 KW	DIESEL ENGINE	20KW
220V-2,2KW	ELECTRIC MOTOR	220V-2,2KW
SUPERELASTIC TYRES	HYDRAULIC TRANSMISSION ON	RUBBER TRACKS
2 KMH	APPROX. MAX. SPEED	2 KMH
25%	GRADEABILITY	40%
UNLESS 360°	TURNTABLE SLEWING	UNLESS 360°
2.400 X 800 MM	INTERCHAGEABLE CAGES (MAX. SIZES)	2.400 X 800 MM
80° + 80°	CAGE ROTATION	80° + 80°
120 \ 200 KG	SAFE WORK. LOAD	120 \ 200 KG
90° - 110°	POSSIBILITY OF INDEPENDENT SETTING OF EACH OUTRIGGER ON	90° - 110°
2.900 MM	VARIABLE GEOMETRY STABILIZATION SYSTEM WITH MIN. WIDTH	2.950 MM
59%	OUTRIGGERS' SELF-LEVELLING ON MAX. SLOPE	39%
1.750 MM	SELF-LOADING ON A STANDARD LORRY (MAX. H.)	1.300 MM
780 MM	MIN. STOWED WIDTH	1.500 MM
5.800 KG	WEIGHT	6.000 KG
2.850 KG	MAX. PRESSURE ON THE GROUND OF ONE OUTRIGGER	3.100 KG
200 KG	EL. WIRE-WINCH INTERCHANGEABLE WITH THE CAGE (LIFTING CAP.TY)	200 KG

25050 PADERNO F.C. (BS) - ITALIA
 Tel ++ 39 030 6857073 - Fax ++ 39 030 657079
 mail: platforms@palazzani.it
 url: www.palazzani.it

TECHNICAL DATA ARE INFORMATIVE ONLY AND CAN CHANGE WITHOUT NOTICE

C0921EF